




MiTOWER PLUS

✓ Professional use


- Can be assembled by 1 person, to be used by 2 persons
- Only 12 minutes to assemble a tower of 8 meter working height
- Stable, strong and robust
- Lightweight, easy to transport and store
- Wooden or lightweight Fiber-Deck® platforms

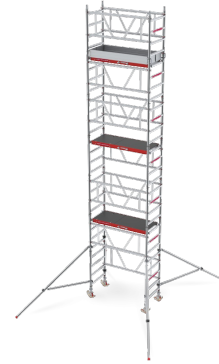

Altrex MiTOWER PLUS 1 Person Quick-Build rolling tower

The MiTOWER PLUS is the successor of the successful MiTOWER. Only one person is needed to assemble this rolling tower. Due to the larger working platform you may work with a colleague. Once completed is this compact rolling tower is simple to transport. A worthy successor of a unique rolling tower.

The smart design forces you to assemble the rolling tower safely. Step for step to a height of up to 8 meter. Platform girders and a unique suspension mechanism in the platforms give you maximum grip and make it extra easy. Double guardrail braces, a handy claw system and double braked castors make the scaffold tower the most stable in its type.



At working height in 12 minutes

The MiTOWER PLUS is assembled in no-time. To the highest level quickly, without the help of a colleague.



Compact and simple transport

You can make a movable trolley with the scaffolding materials. Fits through any standard door opening and in many company vehicles. Dimensions 172 x 83 x 210 cm (L x W x H).



Strong and stable

The Circular robot welded rung-leg post connections of the MiTOWER PLUS makes the strongest and most stable rolling tower of its type.



Unique suspension mechanism

'Extra hands' to suspend materials during the assembly and disassembly of the MiTOWER PLUS. Moving in and out in one quick movement.



Safe to use

The only Rolling tower that you can assemble without assistance. While you can work on it with your colleague.



Your MiTOWER PLUS, your identity

Have your MiTOWER PLUS stand out with the logo, the name and colours of your company. This makes you visible on every level.



Product specifications

EAN	Item number	width	free on façade side	platform type	platform length	safequick	version	floor surface (m2)	max working height general (m)
8711563210943	C003011	0,73	No	Wood	1,62	No	Rolling	3,88 x 3,48	5,20
8711563210967	C003012	0,73	No	Wood	1,62	No	Rolling	3,88 x 3,48	6,20
8711563210981	C003013	0,73	No	Wood	1,62	No	Rolling	3,88 x 3,48	7,20
8711563211001	C003014	0,73	No	Wood	1,62	No	Rolling	3,88 x 3,48	8,20
8711563234765	C003010	0,73	No	Wood	1,62	No	Rolling	3,88 x 3,48	4,20
8711563234758	C003024	0,73	No	Fiber-Deck®	1,62	No	Rolling	3,88 x 3,48	8,20
8711563234727	C003021	0,73	No	Fiber-Deck®	1,62	No	Rolling	3,88 x 3,48	5,20
8711563234734	C003022	0,73	No	Fiber-Deck®	1,62	No	Rolling	3,88 x 3,48	6,20
8711563234741	C003023	0,73	No	Fiber-Deck®	1,62	No	Rolling	3,88 x 3,48	7,20
8711563210417	C003020	0,73	No	Fiber-Deck®	1,62	No	Rolling	3,88 x 3,48	4,20